


TANTALUM ELECTROLYTIC CAPACITORS

THC Series (High reliability at High temperature (up to 150°C Tantalum Chip Capacitors))


Features

The New THC series capacitor was developed based on the existing high reliability TMCH series (which is used in many Automobile applications) with an improved internal element and higher temperature resistance. The operational temperature is up to 150°C with derating voltage.

Product symbol : (Example) THC Series E case 35V 10μF ±20%

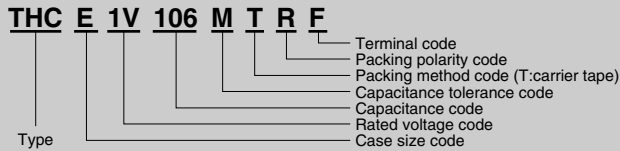

Outline of drawings and dimensions

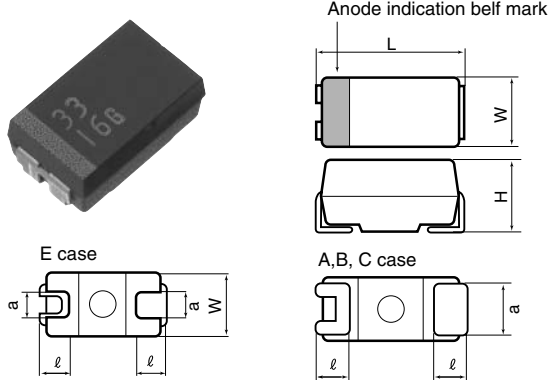

Dimensions (Unit : mm)

Case code	Case size				
	L ^{+0.2}	W ^{+0.2}	H ^{+0.2}	ℓ ^{+0.3}	a ^{+0.2}
A	3.2	1.6	1.6	0.7	1.2
B	3.5	2.8	1.9	0.8	2.2
C	5.8	3.2	2.5	1.3	2.2
E	7.3	4.3 ^{±0.3}	2.8	1.3	2.4

Standard value and case size

Capacitance		Rated voltage (V.DC)				
		10	16	20	25	35
μF	Code	1A	1C	1D	1E	1V
0.33	334					A
0.47	474				A	
0.68	684			A		
1	105		A			B
1.5	155	A			B	
2.2	225			B		
3.3	335		B			C
4.7	475	B			C	C
6.8	685			C	C	
10	106		C	C	C/E	E
15	156	C	C	C/E	E	
22	226	C	C/E	E		
33	336	C/E	E			
47	476	E				

Product specifications	THC	Test conditions JIS C5101-1:1998				
Operating temperature range	-55°C ~ +150°C					
Rated voltage	DC10 ~ 35V	105°C				
Surge voltage	DC13 ~ 45V	85°C				
Derated voltage	DC6.3 ~ 22V	150°C				
Capacitance	0.33 ~ 47μF					
Capacitance tolerance	±10% or 20%	Paragraph 4.7, 120 Hz				
Leakage current	Refer to Standard product table	Paragraph 4.9, in 5 minutes after the rated voltage is applied.				
tanδ	Refer to Standard product table	Paragraph 4.8, 120Hz				
Surge withstanding voltage	ΔC/C	±10% or less				
	tanδ	Specified initial value or less				
	LC	Specified initial value or less				
Temperature characteristics	ΔC/C	Specified initial value	-55	105	150	
			-	-10 ~ 0%	0 ~ +10%	0 ~ +20%
	tanδ	Specified initial value	0.04	0.04	0.06	0.08
		Maximum value or less	0.06	0.06	0.08	0.10
LC	0.005CV or 0.25μA or less	-	0.10CV or 5μA or less	0.125CV or 6.25μA or less	Paragraph 4.24	
Solder heat resistance	ΔC/C	±5% or less	Solder Dip 260±5°C A,B case C,E, case 10±1 sec. Reflow-260°C 10±1 sec.			
	tanδ	Specified initial value or less				
	LC	Specified initial value or less				
Moisture resistance no load	ΔC/C	±10% or less	Paragraph 4.22, 85°C 85%RH, 1000hrs			
	tanδ	150% Specified initial value or less				
	LC	200% Specified initial value or less				
High-temperature load	ΔC/C	±10% or less	85°C The Rated voltage is applied for 2000hrs (Derated voltage in 150°C)			
	tanδ	Specified initial value or less				
	LC	125% Specified initial value or less				
Thermal shock	ΔC/C	±10% or less	Leave at -55°C, normal temperature, 150°C, and normal temperature for 30 min., 3 min., 30 min., and 3 min. Repeat this operation 1000 times running.			
	tanδ	Specified initial value or less				
	LC	200% Specified initial value or less				
Moisture resistance load	ΔC/C	±10% or less	65°C, humidity 90 to 95%RH The rated voltage is applied for 500 hours.			
	tanδ	150% Specified initial value or less				
	LC	200% Specified initial value or less				
Failure rate	0.5% / 1000hrs	85°C. The rated voltage is applied (through a protective resistor of 1 Ω/V).				

※ This catalog is designed for providing general information. Please inquire of our Sales Department to confirm specifications prior to use.

